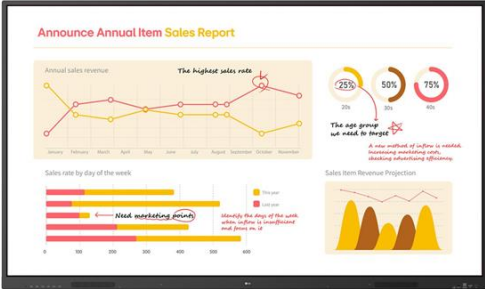


| | |
|--|--|
| 75tr3bq-b |  |
| Codice | CK430919 |
| EAN | 8806096536650 |
| Marca | LG ELECTRONICS |
| Part number | 75TR3BQ-B.AUEQ |
| Storage unit | |
| Unità di vendita | Cadauno |
| Confezione | 1 |
| Imballaggio | 1 |
| Peso (kg) | 51.5 |
| Volume (cm ³) | 473110 |
| <p>LG 75TR3BQ-B lavagna interattiva 190,5 cm (75") 3840 x 2160 Pixel Touch screen NeroSeamless Writing Experience LG CreateBoard delivers a lifelike touch experience with support for 4K resolution, enabling users to write seamlessly, ensuring every detail is crisp and clear. Multi-Touch LG CreateBoard boasts a multi-touch functionality that can concurrently detect up to 40 touch points. This feature facilitates simultaneous touch and gesture inputs from multiple users, fostering easy collaboration and idea sharing among team members. This enables efficient interaction in group activities or meetings. Connect Your Own Device for OS Flexibility LG CreateBoard integrates smoothly with devices across various operating systems, including Windows, Android, and ChromeOS, allowing users to work within their preferred environments. This creates a flexible and highly adaptable workspace tailored to individual needs. C-Type Connection USB-C connectivity simplifies connections which enables charging and sending data simultaneously over just one single cable. OTA (Over-The-Air) Functionality OTA (Over-The-Air) functionality built into the LG CreateBoard enables software updates to be performed wirelessly and automatically, allowing users to maintain the latest features and security patches. Front Connectivity Design LG CreateBoard is designed with front display ports, making it easy for users to connect or disconnect cables. Built-In OPS Slot LG CreateBoard supports OPS slots, allowing users to conveniently mount OPS Module at the back of the screen without the hassle of</p> | |

connecting to an external desktop. This enables various PC functions and Windows software.

SPECIFICHE

| | |
|-------|----------------|
| Marca | LG ELECTRONICS |
| Tipo | monitor |

GENERALE

| | |
|----------------------------|---------------------------|
| Colore principale | Nero |
| Contenuto della confezione | NaN |
| Tecnologia Touch screen | Infra Red Technology (IR) |

FEATURES

| | |
|-------------------------|---|
| Altre caratteristiche | NaN |
| Altre certificazioni | CB / NRTL, FCC Class "A" / CE / KC, ErP |
| Inclinazione range (da) | -178 ° |
| Inclinazione range (a) | 178 ° |

DISPLAY

| | |
|---------------------------------|-----------------------|
| Lunghezza diagonale (pollici) | 75 " |
| Tecnologia pannello | LED |
| Risoluzione massima orizzontale | 3840 |
| Frequenza ottimale | 60 Hz |
| Formato | 16:9 |
| Tempo di risposta | 6,5 ms |
| Luminosità | 350 cd/m ² |
| Dot pitch | 0 mm |
| Angolo di visione orizzontale | 178 ° |
| Angolo di visione verticale | 178 ° |
| Contrasto standard | 5500 :1 |
| Risoluzione massima verticale | 2160 |
| Contrasto dinamico | 5500 :1 |
| Utilizzo | Monitor Interattivo |
| Risoluzione video | 4K (UHD) |

AUDIO

| | |
|--------------|----|
| Multimediale | Si |
|--------------|----|

| | |
|---|-------------------|
| Nr altoparlanti | 2 nr. |
| Potenza | 16 W |
| CONNESSIONI | |
| Nr. porte vga | 0 |
| Nr porte usb | 0 |
| HDMI | 3 |
| Porte dvi-d | 0 |
| DisplayPort | No |
| CONSUMI | |
| Durata esercizio media | 50000 h |
| Potenza assorbita in esercizio | 167 W |
| DIMENSIONE E PESO | |
| Altezza | 102,2 cm |
| Larghezza | 171,2 cm |
| Profondità | 9,8 cm |
| Peso | 42800 gr |
| DIMENSIONI CON IMBALLO | |
| Lato A | 186,3 cm |
| Lato B | 22,5 cm |
| Lato C | 114,8 cm |
| VESA FLAT DISPLAY MOUNTING INTERFACE (FDMI) | |
| Supporto montaggio vesa | Si |
| Formato VESA FDMI (Flat Display Mounting Interface) | MIS-F (800x400mm) |
| SOLUZIONI | |
| Scuola Digitale | Più richiesti EDU |